



Paddle Bellows Flow Monitor for Air



measuring
•
monitoring
•
analysing



- Switching range:
1 - 8 m/s (switching off)
2.5 - 9.2 m/s (switching on)
- t_{max} : 85 °C
- Connection:
connection plate (102x77 mm)
- Material:
brass (lever),
stainless steel (paddle)

KOBOLD companies worldwide:

ARGENTINA, AUSTRIA, BELGIUM, CANADA, CHILE, CHINA, CZECHIA,
FRANCE, GERMANY, GREAT BRITAIN, INDIA, INDONESIA, ITALY,
MALAYSIA, MEXICO, NETHERLANDS, POLAND, SINGAPORE, SLOVAKIA,
SPAIN, SWITZERLAND, THAILAND, USA, VENEZUELA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
☎ +49(0)6192 299-0
Fax +49(0)6192 23398
E-Mail: info.de@kobold.com
Internet: www.kobold.com

Model:
LPS

Description

The monitored air stream acts on the paddle and over a mechanism actuates the dust-proof microswitch that signals whether the set min. or max. volume of air flows. The KOBOLD flow monitor is suited for universal application as the switch/signalling point can be finely adjusted over a broad range.


Applications

- in air ducts in air conditioning systems
- in air discharge and exhaust gas channels
- in pneumatic conveyors
- on filters
- on cyclones
- on cooling and drying plant
- Ventilator/blower performance monitoring

Setting

The device is set to 1 m/s at the factory. The switch-off value can be set higher by rotating the range screw. The paddle should be cut at the marking if required (> 5 m/s air speed). Thus the min. switch-off value is increased to 2.5 m/s and the min. switch-on value to 4 m/s.

Dimensions

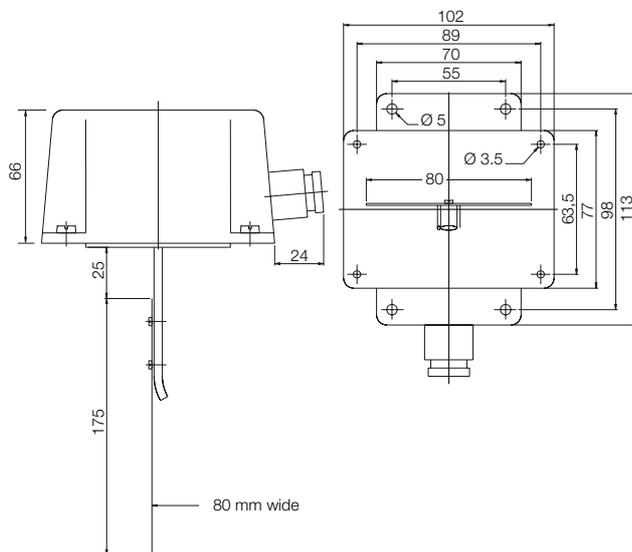

Technical Details

- Switch-off values: min. 1.0 m/s
max. 8.0 m/s
- Switch-on values: min. 2.5 m/s
max. 9.2 m/s
- Differential gap: ≥ 1 m/s
- Mounting position: vertical, in horizontal air ducts
- Inlet and outlet pipe sections: fivefold pipe cross-section upstream and downstream of the vane
- Temperature: max. 85°C (medium and environment)
- Protection type: IP 65 (from outside the channel)

Materials


- Paddle: 0.2 mm stainless steel material no. 1.4301
- Lever: brass Ms 58
- Case: ABS, glass-fibre-reinforced mounting plate zinc-plated
- Connection plate: steel zinc-plated
- Flat gasket: Flexoid

Electrical details

- Dust-proof microswitch as single-pole changeover contact
- Switching voltage: max. 24 - 250 V_{AC}
- Switching current: max. 8 A (for inductive load)
max. 15 A (for resistive load)
- Air temperature: max. 85°C

Electrical connection

RED-WHITE opens with decreasing speed
RED-BLUE closes with increasing speed

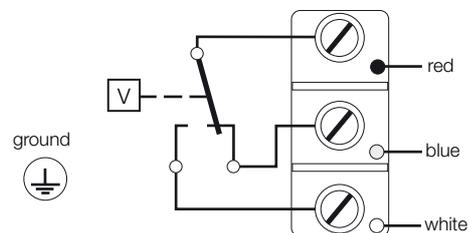

Order Details (Example: LPS-1100)

Description	Order number
Air-flow indicator	LPS-1100