



Resistance Thermometers

Ignition Protection Exd



measuring
•
monitoring
•
analysing

TWL-Exd



- Measuring range: -80 ...+600 °C
- Pt 100-sensor class A respectively class B
- Output: resistance or analogue 4-20 mA
- Thermowells up to 1000, 3000 respectively 5000 mm (depending on model)
- Option: headtransmitter with HART®-protocol or PROFIBUS®/Fieldbus, display
- For ATEX applications, ignition protection Exd



KOBOLD companies worldwide:

ARGENTINA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLUMBIA, CZECHIA, DOMINICAN REPUBLIC, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, ROMANIA, SINGAPORE, SOUTH KOREA, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com



Description

The KOBOLD resistance thermometers comprise a rugged installation fitting made of stainless steel with thread, flange or weld-on connection, a connection head out of aluminium casting and a removable measuring element. The measuring insert can be replaced without emptying the installation, since the customised thermowell remains in the installation and seals the process. The instruments are supplied with the ignition protection Exd as a standard and therefore can be installed in relevant hazardous areas.

A Pt100 temperature sensor according to IEC 751, category A or B is fitted in the measuring insert as standard. Depending on customer request the temperature sensor can be carried out as 2-, 3- or 4-wire circuit.

Alternatively these sensors can be designed as single or double resistance thermometers. Exceptional the 4-wire version, which can only be built with one Pt100 due to lack of space.

As an option the resistance thermometers can be supplied with a head transmitter. Transmitter with a standard 4-20 mA signal, with HART® protocol or with PROFIBUS®/Fieldbus are there to choose from.

Beside the available resistance thermometers according to DIN-standard, there are customised versions relating to the immersion length, the connection head, the materials, the process connection or the tolerance classes deliverable on request.

Head Transmitter

Resistance thermometers with head transmitter are used whenever a measuring signal must be transported long distance without any disturbance.

The head transmitter which is encapsulated in epoxide resin is located right in the connection head and delivers a temperature-linear output signal of 4-20 mA. The head transmitter is available with standardised communication systems just like HART® protocol or PROFIBUS®/Fieldbus.


Applications

The resistance thermometers with thread-, flange- or weld-on connection are favourably used for the temperature measurement in liquids, solids and gaseous media. The reliable watertightness of these installation methods for gauge pressure and vacuum is an important criteria for selection.

Application areas are located in the air-conditioning and cooling industry, the heating-, furnace-, mechanical- and apparatus-construction as well as in the complete industry.

For all applications in hazardous areas, the instruments are supplied with the ignition protection Exd.

Technical Details

Meas. principle:	temperature depending resistor
Meas. range:	-30...+550 °C or -80...+600 °C (others on request)
Sensor:	Pt 100 single- or double-sensor (1x Pt100 or 2x Pt100)
Accuracy:	class A or class B (others on request)
Ambient temperature:	-40...+150 °C with ceramic terminal base (without transmitter) -40...+85 °C (with transmitter) -20...+70 °C (with LCD display) -20...+80 °C (with LED display)
Operating pressure:	up to 250 bar (depending on thermowell) TWL-1: pressureless
Connection head:	form XD with chain
Cable entry:	M 20 x 1.5 standard (others on request)
Materials:	
- Sensor:	stainless steel 1.4404
- Thermowell:	stainless steel 1.4404 (others on request)
- Neckpipe:	stainless steel 1.4404
- Connection head:	aluminium, painted
- Terminal base:	ceramic (without transmitter)
Process connection:	
- Thread:	G ½ male, G ¾ male, G1 male, ½" NPT, ¾" NPT, 1" NPT
- DIN-flange:	DN15, 20, 25, 32, 40, 50
- ANSI flange:	½", ¾", 1", 1 ½", 2"
- Weld-in	¾", 1", 1 ¼"
Sensor wiring:	2-, 3- or 4-wire
Output:	resistance value
Protection:	connection head IP 54...68 depending on cable gland and sealing sensor IP 68
ATEX-approval:	 II 2 GD Ex d IIC T6



Technical Details continued

Head transmitter:

- Output: analogue output 4-20 mA
- Communication: HART®-protocol, PROFIBUS®/Fieldbus
- Minimum meas. span: standard transmitter 25 °K
transmitter with HART® 10 °K
transmitter with PROFIBUS®/Fieldbus 5 °K
- Supply voltage: 8-35 V_{DC} for standard transmitter and transmitter with HART®
9-32 V_{DC} for transmitter with PROFIBUS®/Fieldbus

Display:

- Type: 4 digit LCD or LED
- Supply: loop powered
- Voltage drop out: LCD max. 2.5 V
LED 3.3 V at 4 mA
3.7 V at 20 mA



Order Details (example: **TWL-112LNDN5CA1**)

Model	Sensor specification				
	Type	Sensor type	Sensor wiring	Connection head / transmitter	Process connection of sensor
TWL-	0 = without	0 = without 1 = 1 x Pt100, class B (-30...+550 °C) 2 = 2 x Pt100, class B (-30...+550 °C) 3 = 1 x Pt100, class B (-80...+600 °C) 4 = 2 x Pt100, class B (-80...+600 °C) 5 = 1 x Pt100, class A (-30...+550 °C) 6 = 2 x Pt100, class A (-30...+550 °C) 7 = 1 x Pt100, class A (-80...+600 °C) 8 = 2 x Pt100, class A (-80...+600 °C) X = special	0 = without	0 = without (for TWL-0/3)	N ²⁾ = ½" NPT male G = G ½" male X = special
	1 = standard 2 = with nipple union		2 = 2-wire 3 = 3-wire 4 ¹⁾ = 4-wire	L = ATEX Exd / without transmitter A = ATEX Exd/programmable 2-wire transmitter B = ATEX Exd/ 2-wire transmitter with HART® protocol C = ATEX Exd/transmitter with PROFIBUS®/Fieldbus X = special option (specify in clear text) for options A, B, C choose sensor wiring code "3"	
	3 = measuring insert		0 = without		

¹⁾ 4-wire only for 1 sensor

²⁾ choose "N" for TWL-2



Resistance Thermometers Model TWL Exd

Order Details continued

Thermowell specification				Length (sensor, thermowell, measuring insert) ⁴⁾ (see drawings)	Options
Thermowell type	Process connection	Process connection size	Nominal pressure (process connection)		
0 = without B = cylindrical, multipart, welded G = cylindrical, bar stock/drilled with stepped shank D = tapered shank, bar stock/drilled X = special option	0 = without (for TWL-3) G = G-thread N = NPT-thread	0 = without (for TWL-3) 4 = 1/2" (not for thermowell D) 5 = 3/4" 6 = 1" X = special	0 = without (for TWL-3) A = PN 25 (only for thermowell B) B = PN 100 (only for thermowell G) C = PN 250 (only for thermowell D)	only for TWL-0 (only thermowell) 0 = without lagging extension 1 = with lagging extension sensor with thermowells (only for TWL-1/TWL-2) A = with standard neckpipe/ without lagging ext. B = with standard neckpipe and with lagging extension C⁵⁾ = without neckpipe / with lagging extension D⁵⁾ = without neckpipe/ without lagging extension E = with special neckpipe length/ with lagging ext. F = with special neckpipe length/ without lagging ext. sensor without thermowells (only for TWL-1/TWL-2) G = with standard neckpipe length "HL" H = with special neckpipe length "HL" J = without neckpipe "HL" X = special option (specify in clear text) M = measuring insert (only for TWL-3, specify length ML)	0 = without 1 = with LCD display 2 = with LED display Y = special option (specify in clear text)
	S³⁾ = welded	5 = 3/4", only for thermowell G 6 = 1" 7 = 1 1/4", only for thermowell D X = special	B = PN 100 (only for thermowell G) C = PN 250 (only for thermowell D)		
	F = DIN flange	4 = DN 15 (not for thermo- well G/D) 5 = DN 20 6 = DN 25 7 = DN 32 8 = DN 40 9 = DN 50 X = special	1 = PN 6 2 = PN 16 3 = PN 40 4 = PN 100 (not for DN 15) X = special		
	A = ANSI flange	4 = 1/2" (not for thermowell G/D) 5 = 3/4" 6 = 1" 8 = 1 1/2" 9 = 2" X = special	5 = 150 lbs 6 = 300 lbs 7 = 600 lbs (not for 1/2") 8 = 900 lbs (not for 1/2") 9 = 1500 lbs (not for 1/2") X = special		

³⁾ not for thermowell type B

⁴⁾ Immersion length "U" and hole diameter "i" (when ordering a/with thermowell) or "EL" (when ordering without thermowell), neckpipe length "HL" (when different from stdd. i.e. for TWL-1 stdd. is 130 mm, for TWL-2 standard is 150 mm), lagging extension "T" (if ordered) and measuring insert length "ML" (when ordering TWL-3) must be specified in clear text when ordering.

Pls. check lengths very precisely in order to ensure a perfect match between sensor and thermowell.

⁵⁾ not for TWL-2



Order Details for Ordering only the Thermowell (example: **TWL-0000NBG4000**)

Model	Sensor type	Sensor type/class	Sensor Wiring	Connection head / transmitter	Process connection of temperature sensor ¹⁾
TWL-	0 = without	0 = without	0 = without	0 = without	N ¹⁾ = 1/2" NPT male G = G 1/2" male X = special


¹⁾ choose N for nipple and union version

Order Details for Ordering only the Thermowell continued:


Thermowell specification				Immersion length and lagging extension length ¹⁾	Special option
Thermowell type	Process connection size	Nominal pressure (process connection)	Pressure rating for flange connection		
Please use the specification codes according to order table shown on page 4				0 = without lagging extension 1 = with lagging extension	0 = without Y = option acc. specification

¹⁾ Immersion length "U", hole diameter "i" and lagging extension "T" must be specified in writing. Please check lengths very precise in order to ensure a perfect match of sensor and thermowell.

Dimensions Temperature Sensor TWL-1

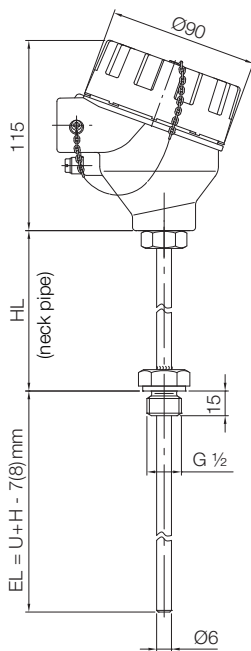


Dimensions Temperature Sensor TWL-2

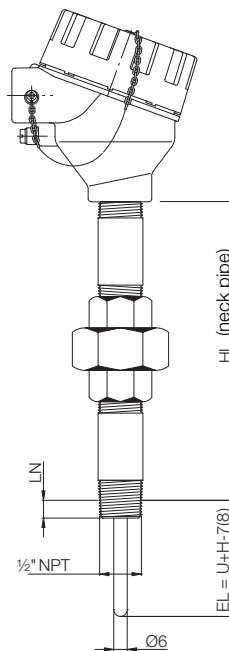

- HL** = neckpipe length
standard 130 mm for TWL-1
standard 150 mm for TWL-2
- EL** = immersion length
EL = U+H-7 mm for thermowell type B
U+H-8 mm for thermowell type G/D


- U** = immersion length thermowell (see drawing thermowell)
- H** = length see thermowell
- LN** = screw-in-length by hand (approx. 8.1 mm at 1/2" NPT)

Dimensions Measuring Insert TWL-3

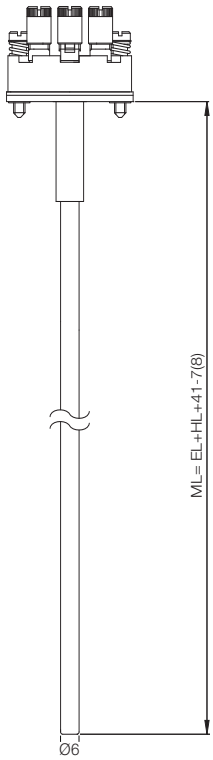


HL = neckpipe length
 EL = immersion length
 ML = measuring insert length

Dimensions Connection Head with Display

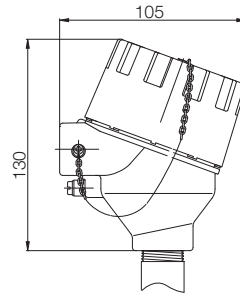


Lagging Extension "T"

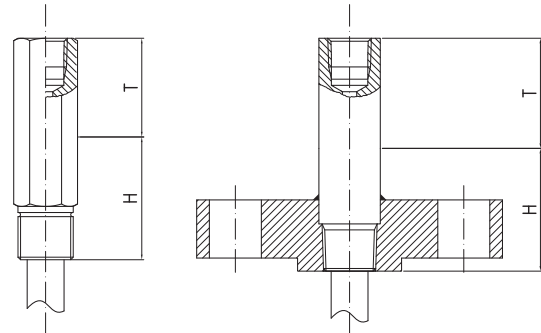


Dimensions Thermowell

Cylindrical thermowell, welded, with process connection G-thread (max. PN 25 at 400 °C)

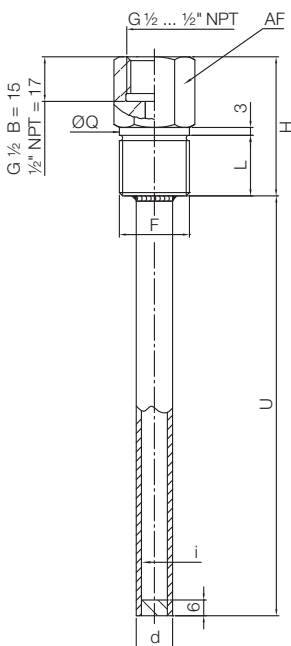


Process connection	Max. total length	AF	F	i	d	H	L	Q
G-thread	5000 mm	27	G 1/2 B	10	12	36	14	26
				12	14			
		32	G 3/4 B	10	12	38	16	31.7
				12	14			
		41	G 1 B	10	12	40	18	39
				12	14			

Cylindrical thermowell, welded, with process connection NPT-thread (max. PN25 at 400 °C)

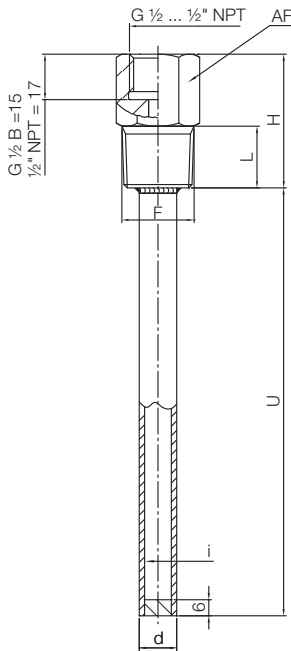

Process connection	Max. total length	AF	F	i	d	H	L
NPT-thread	5000 mm	24	1/2 NPT	10	12	42	17
				12	14		
		27	3/4 NPT	10	12	43	18
				12	14		
		36	1 NPT	10	12	46	21
				12	14		


Cylindrical thermowell, welded, with process connection flange acc. DIN or ANSI (max. PN6...40 at 400 °C)

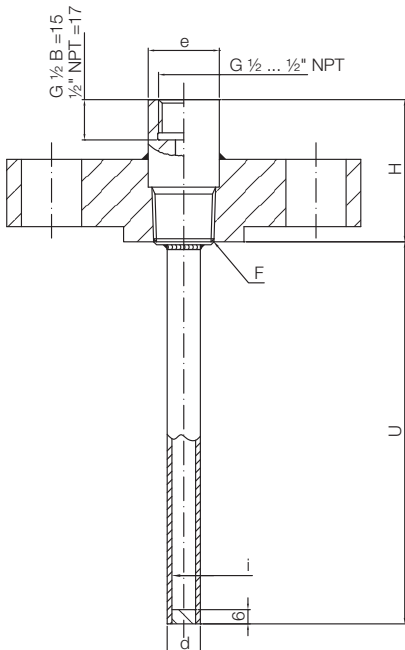

Process connection	Max. total length	F	i	d	H	e
with flange	5000 mm	1/2 NPT	10/12	12/14	40	30
		1/2 NPT				
		3/4 NPT				
		1 NPT	10/12	12/14	40	35
		1 NPT				
		1/2 NPT				
		DIN DN 15	10/12	12/14	40	30
		DIN DN 20				
		3/4 NPT				
		DIN DN 25	10/12	12/14	40	35
		1 NPT				
		1 NPT				
DIN DN 40	10/12	12/14	40	35		
DIN DN 50						


Dimensions Thermowell Model TWL-...G...

Cylindrical thermowell, bar stock/drilled with stepped shank and process connection G-thread (max. PN 100 at 400 °C)

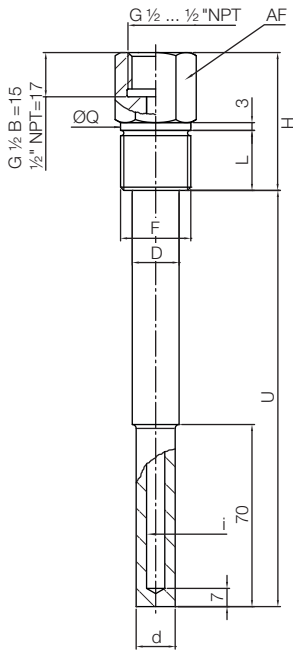


Process connection	Max. total length	SW	F	i	d	D	H	L	Q
G-thread	1000 mm	27	G 1/2 B	7-8-9	15	17.5	46	20	26
				10-12	17.5	17.5			31.7
		36	G 3/4 B	7-8-9	15	18	51	39	
				10-12	18	21			
		41	G 1 B	7-8-9	15	21	51	39	
				10-12	18	25			

Cylindrical thermowell, bar stock/drilled with stepped shank and process connection NPT-thread (max. PN 100 at 400 °C)

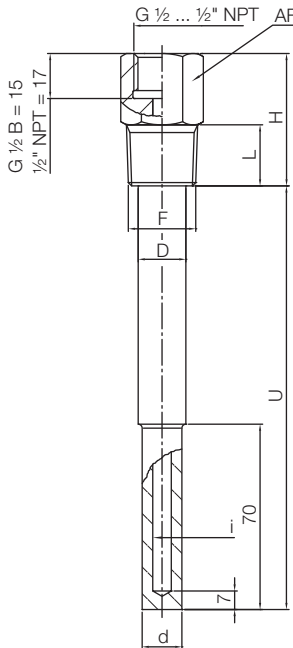


Process connection	Max. total length	AF	F	i	d	D	H	L
NPT-thread	1000 mm	24	1/2 NPT	7-8-9	15	17.5	46	20
				10-12	17.5	17.5		
		27	3/4 NPT	7-8-9	15	18	51	25
				10-12	18	21		
		36	1 NPT	7-8-9	15	21	51	25
				10-12	18	25		

Cylindrical thermowell, bar stock/drilled with stepped shank and process connection flange acc. DIN or ANSI (max. PN 100 at 400°C)

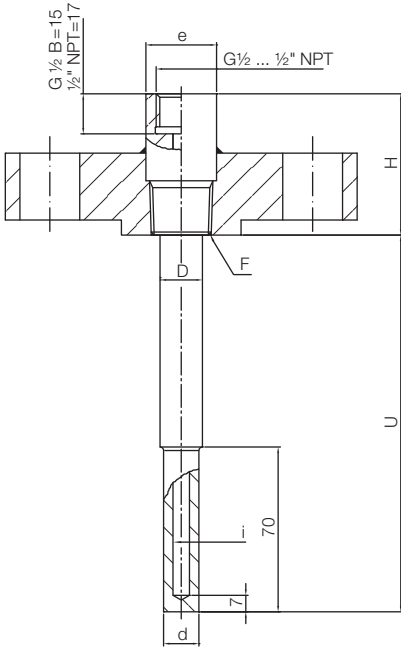

Process connection		Max. total length	F	i	d	D	H	e	
flange	ANSI 3/4"	1000 mm	1/2 NPT	7-8-9	15	17.5	60	30	
				10-12	17.5	17.5			
	ANSI 1"		3/4 NPT	7-8-9	15	18			35
				10-12	18	21			
	ANSI 1 1/2"		1 NPT	7-8-9	15	21		60	35
				10-12	18	25			
	ANSI 2"		1 NPT	7-8-9	15	21	60	35	
				10-12	18	25			
	DIN DN 20		1/2 NPT	7-8-9	15	17.5	60	30	
				10-12	17.5	17.5			
	DIN DN 25		3/4 NPT	7-8-9	15	18			35
				10-12	18	21			
	DIN DN 32		1 NPT	7-8-9	15	21		60	35
				10-12	18	25			
DIN DN 40	1 NPT	7-8-9	15	21	60	35			
		10-12	18	25					
DIN DN 50	1 NPT	7-8-9	15	21	60	35			
		10-12	18	25					


Cylindrical thermowell, bar stock/drilled with stepped shank and process connection for weld-on (max. PN 100 at 100°C)

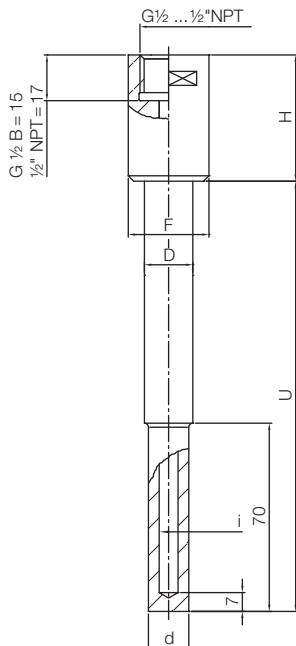

Process connection		Max. total length	F	i	d	D	H
for weld-on	DN 3/4"	1000 mm	26.9	7-8-9	15	19	46
				10-12	18		
	DN 1"		33.4	7-8-9	15	22	51
				10-12	18		


Dimensions Thermowell Model TWL-...D...

Tapered shank, bar stock/drilled thermowell with process connection G-thread (max. PN250 at 400 °C)

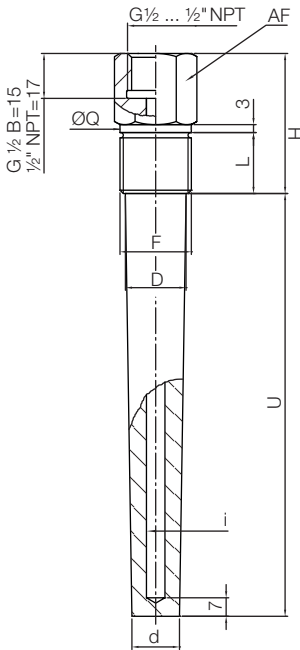


Process connection	Max. total length	AF	F	i	d	D	H	L	Q
G-thread	1000 mm	36	G 3/4 B	7-8-9	18	23	46	20	31.7
				10-12	21				
		41	G 1 B	7-8-9	18	29	51	25	39
				10-12	21				

Tapered shank, bar stock/drilled thermowell with process connection NPT-thread (max. PN250 at 400 °C)

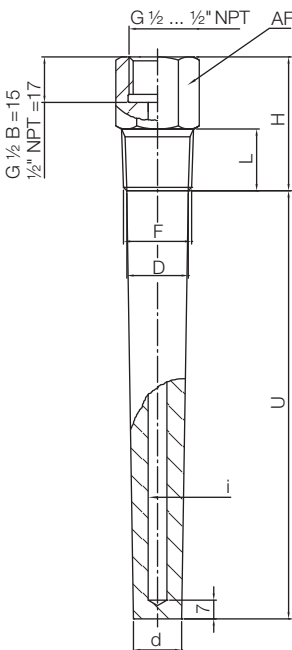


Process connection	Max. total length	AF	F	i	d	D	H	L
NPT-thread	1000 mm	27	3/4 NPT	7-8-9	18	23	46	20
				10-12	21			
		36	1 NPT	7-8-9	18	29	51	25
				10-12	21			

Tapered shank, bar stock/drilled thermowell with process connection flange acc. DIN or ANSI (max. PN250 at 400 °C)

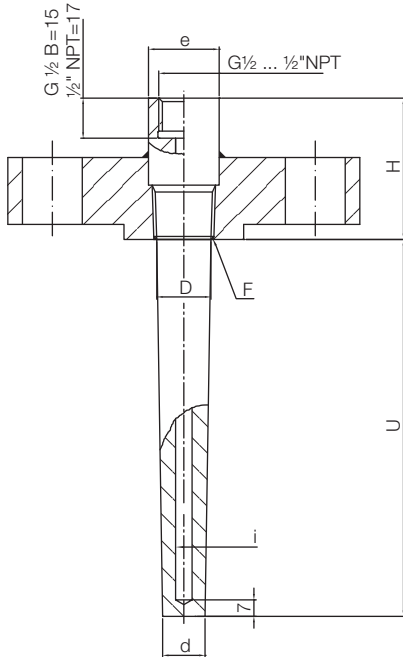

Process connection		Max. total length	F	i	d	D	H	e		
flange	ANSI 1"	1000 mm	3/4 NPT	7-8-9	18	23	60	30		
				10-12	21					
	ANSI 1 1/2"		1 NPT	7-8-9	18	29		60	35	
				10-12	21					
	ANSI 2"		1 NPT	7-8-9	18	29			60	35
				10-12	21					
	DIN DN 25		3/4 NPT	7-8-9	18	23	60			30
				10-12	21					
	DIN DN 32		1 NPT	7-8-9	18	29		60		35
				10-12	21					
	DIN DN 40		1 NPT	7-8-9	18	29			60	35
				10-12	21					
DIN DN 50	1 NPT	7-8-9	18	29	60	35				
		10-12	21							

Tapered shank, bar stock/drilled thermowell with process connection for weld-on (max. PN250 at 400 °C)

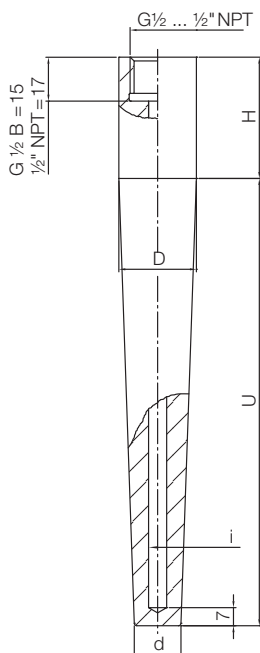

Process connection		Max. total length	i	d	D	H
for weld-on	DN 1"	1000 mm	7-8-9	18	33.4	51
			10-12	21		
	DN 1 1/4"		7-8-9	18	38.1	51
			10-12	21		



Resistance Thermometers according to DIN

Ignition Protection Exia



measuring
•
monitoring
•
analysing

TWL-Exia



- Measuring range: -80...+600 °C
- Pt 100-sensor class A respectively class B
- Output: resistance or analogue 4-20 mA
- Thermowells according to DIN 43772
- Special sensor length available
- Option: headtransmitter with HART® protocol, or PROFIBUS®/Fieldbus
- For ATEX applications, ignition protection Exia



KOBOLD companies worldwide:

ALGERIA, ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLUMBIA, CZECHIA, DOMINICAN REPUBLIC, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, MOROCCO, NETHERLANDS, PERU, PHILIPPINES, POLAND, ROMANIA, SINGAPORE, SLOVAKIA, SOUTH KOREA, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, USA, VENEZUELA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 299-23398
info.de@kobold.com
www.kobold.com



Description

The KOBOLD resistance thermometers model TWL comprise a rugged installation fitting made of stainless steel with thread, flange or weld-on connection, a connection head form B out of aluminium casting and a removable measuring insert. The measuring insert can be replaced without emptying the process. The instruments are supplied with the ignition protection Exia as a standard and therefore can be installed in relevant hazardous areas.

A Pt 100 temperature sensor according to IEC 751, category A or B is fitted in the measuring insert as standard. Depending on customer request the temperature sensor can be carried out as 2-, 3- or 4-wire circuit.

Alternatively these sensors can be designed as single or double resistance thermometers. Exceptional the 4-wire version, which can only be build with one Pt 100 due to lack of space.

As an option the resistance thermometers can be supplied with a head transmitter. Transmitter with a standard 4-20 mA signal and transmitter with HART® protocol or with PROFIBUS®/Fieldbus are there to choose from.

Beside the available resistance thermometers according to DIN-standard, there are customised versions relating to the immersion length, the connection head, the materials, the process connection or the tolerance classes deliverable on request.

Head Transmitter

Resistance thermometers with head transmitter are used whenever a measuring signal must be transported long distance without any disturbance.

The head transmitter which is encapsulated in epoxide resin is located right in the connection head and delivers a temperature-linear output signal of 4-20 mA. The head transmitter is available with standardised communication systems just like HART® protocol or PROFIBUS®/Fieldbus.


Applications

The resistance thermometers are favourably used for the temperature measurement in liquids, solids and gaseous media. The reliable watertightness of this installation method for gauge pressure and vacuum is an important criteria for selection.

Application areas are located in the air-conditioning and cooling industry, the heating-, furnace-, mechanical- and apparatus construction as well as in the complete industry.

For all applications in hazardous areas, the instruments are supplied with the ignition protection Exia.

Technical Details

Meas. principle:	temperature depending resistor
Meas. range:	-80...+600 °C
Sensor:	Pt 100, single- or double-sensor (1 x Pt 100 or 2 x Pt 100)
Accuracy:	class A or class B (others on request)
Ambient temperature:	-40...+150 °C with ceramic terminal base -40...+85 °C with transmitter
Operating Pressure:	depending on TWL version
Connection head:	form B with chain
Materials:	
- Sensor:	stainless steel 1.4571 (exception: TWL-D)
- Thermowell:	stainless steel 1.4571 (exception: TWL-D) incl. mounting thread, flange or weld-on sleeve
- Neckpipe:	stainless steel 1.4571 (exception: TWL-D)
- Connection head:	aluminium, painted
Terminal base:	ceramic (without transmitter)
Process connection:	thread G ½ male, G1 male flange DN 25 weld-on sleeve Ø 24 h7
Electrical connection:	2-, 3- or 4-wire
Output:	resistance value
Protection:	connection head IP 65 sensor IP 68
ATEX-approval:	 II 1 GD Exia
Head transmitter:	
- Output:	analogue output 4-20 mA
- Communication:	HART®-protocol, PROFIBUS®/Fieldbus
- Minimum meas. span:	standard transmitter 25 °K transmitter with HART® 10 °K transmitter with PROFIBUS®/ Fieldbus 5 °K
- Supply voltage:	8-30 V _{DC} for standard transmitter and transmitter with HART® 9-30 V _{DC} for transmitter with PROFIBUS®/Fieldbus

Screw-in resistance thermometer form 2G with neckpipe, protection Exia,
thermowell G ½ male according to DIN 43772 (with neckpipe), p_{max} 10 bar

Model	Immersion length [mm]	Process connection	Sensor type/ category ²⁾	Wiring	Connection head	Head transmitter	Special option
TWL-B94	10 = 100 Ø 8x6 mm	2 = G ½ AG	1 = 1 xPt 100 cat. B -80...+600°C	2 = 2-wire 3 = 3-wire 4 ³⁾ = 4-wire	G = form B, with chain Y = special connec- tion head (to be specified in writing)	0 = without A ⁴⁾ = programmable transmitter 2-wire B ⁴⁾ = transmitter with HART® protocol 2-wire C ⁴⁾ = transmitter PROFIBUS®/ Fieldbus	0 = without Y = acc. description
	16 = 160 Ø 8x6 mm		2 = 2 xPt 100 cat. B -80...+600°C				
	25 = 250 Ø 8x6 mm		3 = 1 xPt 100 cat. A -80...+600°C				
	40 = 400 Ø 8x6 mm		4 = 2 xPt 100 cat. A -80...+600°C				
	XX ¹⁾ = special length Ø 8x6 mm						

¹⁾ Please specify special length in writing.

²⁾ Maximum temperature +750 °C on request.

³⁾ only with 1x Pt100

⁴⁾ Please specify measuring range in writing.

Screw-in resistance thermometer form 2G with neckpipe, protection Exia,
thermowell G 1 male according to DIN 43772, p_{max} 10 bar

Model	Immersion length [mm]	Process connection	Sensor type/ category ²⁾	Wiring	Connection head	Head transmitter	Special option
TWL-CB4	10 = 100 Ø 10x8 mm	4 = G 1 AG	1 = 1 xPt 100 cat. B -80...+600°C	2 = 2-wire 3 = 3-wire 4 ³⁾ = 4-wire	G = form B, with chain Y = special connec- tion head (to be specified in writing)	0 = without A ⁴⁾ = programmable transmitter 2-wire B ⁴⁾ = transmitter with HART® protocol 2-wire C ⁴⁾ = transmitter PROFIBUS®/ Fieldbus	0 = without Y = acc. description
	16 = 160 Ø 10x8 mm		2 = 2 xPt 100 cat. B -80...+600°C				
	25 = 250 Ø 10x8 mm		3 = 1 xPt 100 cat. A -80...+600°C				
	40 = 400 Ø 10x8 mm		4 = 2 xPt 100 cat. A -80...+600°C				
	XX ¹⁾ = special length Ø 10x8 mm						

¹⁾ Please specify special length in writing.

²⁾ Maximum temperature +750 °C on request.

³⁾ only with 1x Pt100

⁴⁾ Please specify measuring range in writing.

Screw-in resistance thermometer form 3G with neckpipe, protection Exia, tapered thermowell G 1 male according to DIN 43772 for faster response time, p_{max} 30 bar

Model	Immersion length [mm]	Process connection	Sensor type/ category ²⁾	Wiring	Connection head	Head transmitter	Special option
TWL-G94	16 = 160 Ø 8x6 mm 25 = 250 Ø 8x6 mm 28 = 280 Ø 8x6 mm XX ¹⁾ = special length Ø 8x6 mm	4 = G 1 AG	1 = 1 xPt 100 cat. B -80...+600°C 2 = 2 xPt 100 cat. B -80...+600°C 3 = 1 xPt 100 cat. A -80...+600°C 4 = 2 xPt 100 cat. A -80...+600°C	2 = 2-wire 3 = 3-wire 4 ³⁾ = 4-wire	G = form B, with chain Y = special connection head (to be specified in writing)	0 = without A ⁴⁾ = programmable transmitter 2-wire B ⁴⁾ = transmitter with HART® protocol 2-wire C ⁴⁾ = transmitter PROFIBUS®/ Fieldbus	0 = without Y = acc. description

¹⁾ Please specify special length in writing.

²⁾ Maximum temperature +750 °C on request.

³⁾ only with 1x Pt100

⁴⁾ Please specify measuring range in writing.

Immersion resistance thermometer form 1, protection Exia, thermowell according to DIN 43772 with adjustable flange, p_{max} 10 bar

Model	Immersion length [mm]	Process connection	Sensor type/ category ⁴⁾	Wiring	Connection head	Head transmitter	Special option
TWL-1F4	50 = 500 Ø 15 mm 71 = 710 Ø 15 mm 1T = 1000 Ø 15 mm T4 = 1400 Ø 15 mm 2T = 2000 Ø 15 mm XX ¹⁾ = special length Ø 15 mm	B = adjustable G ¾ male st.st. C = aluminium sliding flange DIN 43743	1 = 1 xPt 100 cat. B -80...+600°C 2 = 2 xPt 100 cat. B -80...+600°C 3 = 1 xPt 100 cat. A -80...+600°C 4 = 2 xPt 100 cat. A -80...+600°C	2 = 2-wire 3 = 3-wire 4 ³⁾ = 4-wire	G = form B, with chain Y = special connection head (to be specified in writing)	0 = without A ⁴⁾ = programmable transmitter 2-wire B ⁴⁾ = transmitter with HART® protocol 2-wire C ⁴⁾ = transmitter PROFIBUS®/ Fieldbus	0 = without Y = acc. description

¹⁾ Please specify special length in writing.

²⁾ Maximum temperature +750 °C on request.

³⁾ only with 1x Pt100

⁴⁾ Please specify measuring range in writing.

**Weld-on resistance thermometer form 4, protection Exia,
thermowell according to DIN 43772, p_{max} 500 bar**

Model	Immersion length EL/L [mm]	Process connection	Sensor type/ category ³⁾	Wiring	Connection head	Head transmitter	Special option
TWL-D	1406 = 65/140 (D1) st.st. 1.4571 2412 = 125/200 (D2) st.st. 1.4571 4406 = 65/200 (D4) st.st. 1.4571 5412 = 125/260 (D5) st.st. 1.4571 XXXX ¹⁾ = special length	0 = weld-on	1 = 1 x Pt 100 cat. B -80...+600°C 2 = 2 x Pt 100 cat. B -80...+600°C 3 = 1 x Pt 100 cat. A -80...+600°C 4 = 2 x Pt 100 cat. A -80...+600°C	2 = 2-wire 3 = 3-wire 4 ⁴⁾ = 4-wire	G = form B, with chain Y = special connec- tion head (to be specified in writing)	0 = without A ⁵⁾ = programmable transmitter 2-wire B ⁵⁾ = transmitter with HART® protocol 2-wire C ⁵⁾ = transmitter PROFIBUS®/ Fieldbus	0 = without Y = acc. description
	1906 ²⁾ = 65/140 (D1) st.st. 1.4903 2912 ²⁾ = 125/200 (D2) st.st. 1.4903 4906 ²⁾ = 65/200 (D4) st.st. 1.4903 5912 ²⁾ = 125/260 (D5) st.st. 1.4903 XXXX ¹⁾ = special length						

¹⁾ Please specify special length in writing.

¹⁾ Stainless steel 1.7380 or 1.7337 on request.

²⁾ Maximum temperature +750 °C on request.

³⁾ only with 1x Pt100

⁴⁾ Please specify measuring range in writing.

**Insertion resistance thermometer form 3F, protection Exia flange DN 25 PN 40,
tapered thermowell according to DIN 43772 for faster response time, p_{max} 50 bar**

Model	Immersion length [mm]	Process connection	Sensor type/ category ²⁾	Wiring	Connection head	Head transmitter	Special option
TWL-F94	22 = 225 28 = 285 34 = 345 XX ¹⁾ = special length	4 = DN 25	1 = 1 x Pt 100 cat. B -80...+600°C 2 = 2 x Pt 100 cat. B -80...+600°C 3 = 1 x Pt 100 cat. A -80...+600°C 4 = 2 x Pt 100 cat. A -80...+600°C	2 = 2-wire 3 = 3-wire 4 ³⁾ = 4-wire	G = form B, with chain Y = special connec- tion head (to be specified in writing)	0 = without A ⁴⁾ = programmable transmitter 2-wire B ⁴⁾ = transmitter with HART® protocol 2-wire C ⁴⁾ = transmitter PROFIBUS®/ Fieldbus	0 = without Y = acc. description

¹⁾ Please specify special length in writing.

²⁾ Maximum temperature +750 °C on request.

³⁾ only with 1x Pt100

⁴⁾ Please specify measuring range in writing.

Spare measuring insert for resistance thermometer according to DIN 43772 and protection Exia

Model	Immersion length [mm]	For form	Measuring insert length	Sensor type/ category ²⁾	Wiring	Head transmitter	Special option	
TWL-M82 Ø 8 mm	0050 = 500	1	528					
	0071 = 710		738					
	001T = 1000		1028					
	00T4 = 1400		1428					
	002T = 2000		2028					
	XXXX ¹⁾ = special length		acc. to special length					
TWL-M62 Ø 6 mm	0010 = 100	2G (Model TWL-CB4 only)	258					
	0016 = 160		318					
	0025 = 250		408					
	0040 = 400		558					
	XXXX ¹⁾ = special length		acc. to special length					
	TWL-M52 Ø 5 mm		0010 = 100					2G (Model TWL-B94 only)
0016 = 160		318						
0025 = 250		408						
0040 = 400		558						
XXXX ¹⁾ = special length		acc. to special length						
0022 = 225		3F	318					
0028 = 285			378					
0034 = 345			438					
XXXX ¹⁾ = special length			acc. to special length					
0016 = 160			3G	318				
0025 = 250				408				
0028 = 280		438						
XXXX ¹⁾ = special length	acc. to special length							
1406 = 65/140	4	322						
2412 = 125/200		382						
4406 = 65/200		382						
5412 = 125/260		442						
1906 = 65/140		322						
2912 = 125/200		382						
4906 = 65/200	382							
5912 = 125/260	442							
XXXX ¹⁾ = special length	acc. to special length							

¹⁾ Please specify special length in writing.


²⁾ Maximum temperature +750 °C on request.

³⁾ only with 1x Pt100


⁴⁾ Please specify measuring range in writing.

Dimensions


TWL-B...

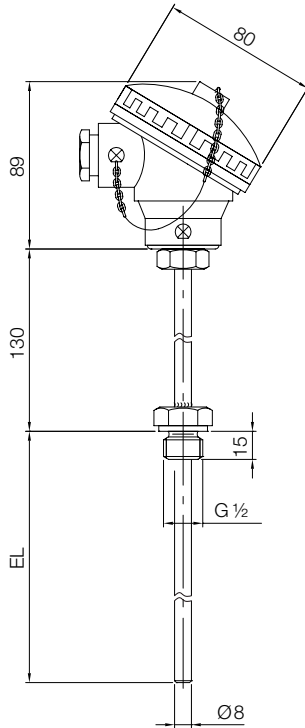


TWL-C...

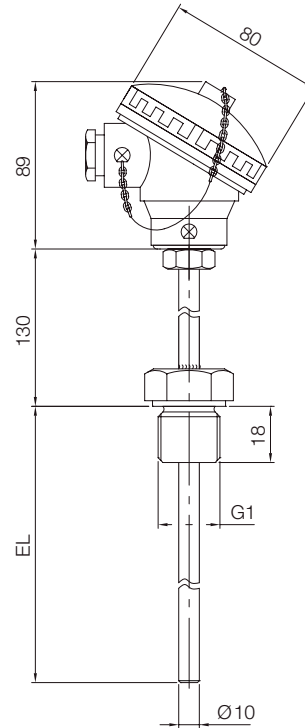

TWL-G...

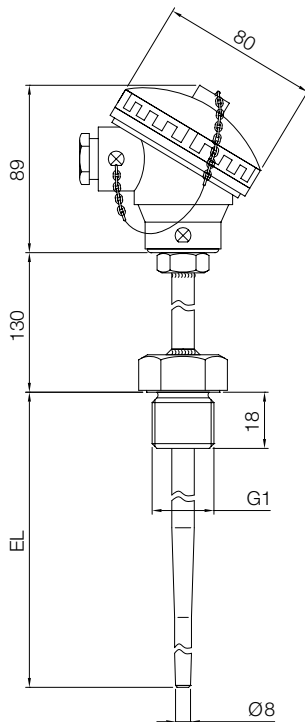

TWL-1F...

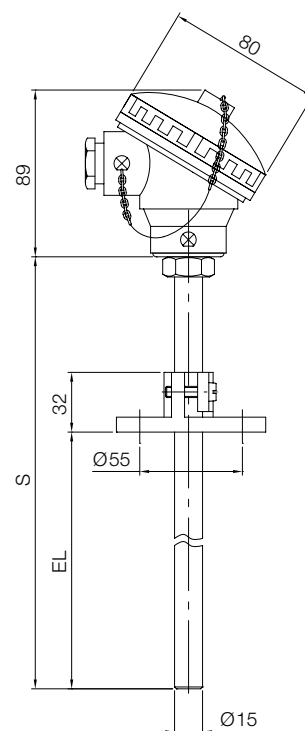


EL = immersion length S = overall probe length


No responsibility taken for errors;
subject to change without prior notice.

Dimensions

TWL-D...

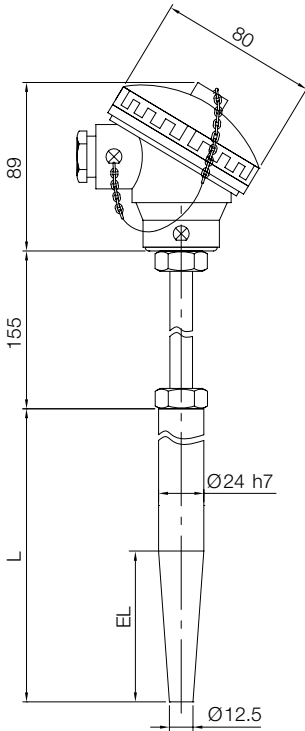


TWL-F...

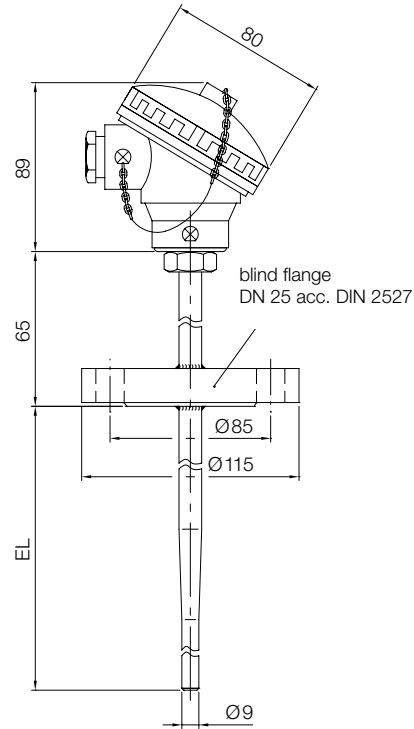

L = overall length weld-on probe
EL = immersion length

TWL-M...

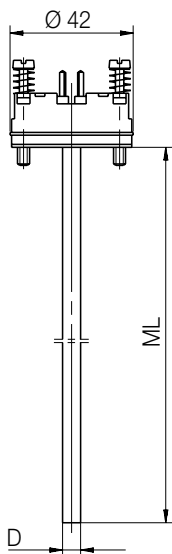

Diameter D	
...M82...	8mm
...M62...	6mm
...M52...	5mm

ML = length measuring insert

T2